

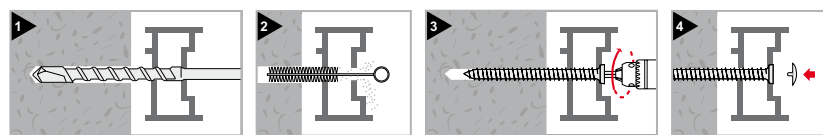


VF

Concrete screw
Vis pour béton



Cylindrical head
white zinc plated
Torx T15 recess - Ø5
Torx T30 recess - Ø7,5

Tête cylindrique
zingué blanc
empreinte Torx T15 - Ø5
empreinte Torx T30 - Ø7,5



Code	Dimension Ø x L	Head Tête Ø	Hole Trou Ø	Fixing thickness Epaiss. à fixer max ⁽¹⁾	Pkg.	Outerbox Cond.
19418b05060	5x62	5	4	30	100	1200
19418b05080	5x82	5	4	50	100	800
19418b05110	5x112	5	4	80	100	600
19418b07060	7,5x60	8,5	6	30	100	800
19418b07070	7,5x70	8,5	6	40	100	800
19418b07080	7,5x80	8,5	6	50	100	800
19418b07090	7,5x90	8,5	6	60	100	800
19418b07100	7,5x100	8,5	6	70	100	800
19418b07120	7,5x120	8,5	6	90	100	600
19418b07135	7,5x135	8,5	6	105	100	600
19418b07150	7,5x150	8,5	6	120	100	600
19418b07180	7,5x180	8,5	6	150	100	400
19418b07210	7,5x210	8,5	6	180	50	200
19418b07240	7,5x240	8,5	6	210	50	-

⁽¹⁾ Max fixing thickness refers to installation on concrete / Épaisseur max à fixer pour béton



Countersunk head
white zinc plated
Torx T30 recess

Tête fraisée
zingué blanc
empreinte Torx T30



Code	Dimension Ø x L	Head Tête Ø	Hole Trou Ø	Fixing thickness Epaiss. à fixer max ⁽¹⁾	Pkg.	Outerbox Cond.
19419b07040	7,5x40	11,5	6	10	100	1200
19419b07060	7,5x60	11,5	6	30	100	800
19419b07070	7,5x70	11,5	6	40	100	800
19419b07080	7,5x80	11,5	6	50	100	800
19419b07090	7,5x90	11,5	6	60	100	800
19419b07100	7,5x100	11,5	6	70	100	800
19419b07120	7,5x120	11,5	6	90	100	600
19419b07135	7,5x135	11,5	6	105	100	600
19419b07150	7,5x150	11,5	6	120	100	600
19419b07180	7,5x180	11,5	6	150	100	400
19419b07210 ⁽²⁾	7,5x210	11,5	6	180	50	200
19419b07240 ⁽²⁾	7,5x240	11,5	6	210	50	-

⁽¹⁾ Max fixing thickness refers to installation on concrete / Épaisseur max à fixer pour béton

⁽²⁾ Size not covered by CE certification / Dimension non certifiée CE